



REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

a.HOUSING:LCP WHITE
b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING: Sn100U"~120U")
SEE ORDERING INFORMATION

2.ELECTRIC:

a.CONTACT RESISTANCE: 50 MILLIOHMS MAX
b.INSULATION RESISTANCE: 100 MEGA OHMS MIN
c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: -25° C~ +85° C

ORDERING INFORMATION

BS-16-A4AK006

电池盒

电池型号

DIP 90° TYPE







PLATING:
A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK
5A-PA9T BLACK

工程部

2020-05-12

LQ. HUANG

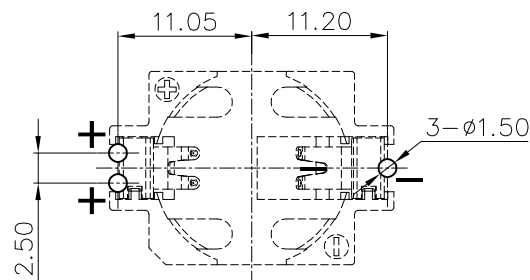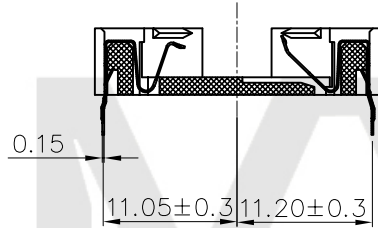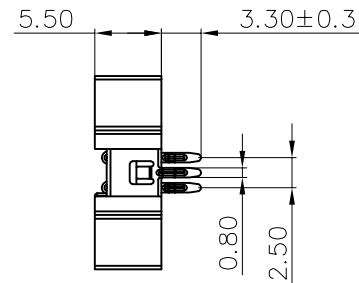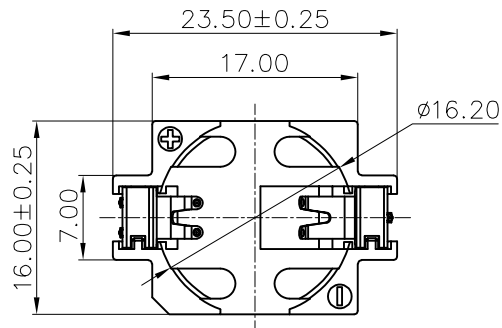

PCB Layout Diagram
TOP View

3	TERMINAL-	1	PHOSPHOR BRONZE, T=0.15mm	Sn-Plating
2	TERMINAL+	1	PHOSPHOR BRONZE, T=0.15mm	Sn-Plating
1	HOUSING	1	LCP	WHITE
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美用 www.meiyangdz.com			
DECIMALS: X :±0.30 X.X :±0.25 X.XX :±0.20 X.XXX :±0.10	ANGLES: X :±1° X.X :±0.5°	DSND	YangFeng	DATE	2020-05-12
WEIGHT:		CHKD	ZhouRuicai	DATE	2020-05-12
		APVD	XueShunyang	DATE	2020-05-12
SHEET 1 OF 1		SCALE:	SIZE: A4	VIEW:	TITLE: BS-1632-1 Sn DIP
		UNIT: mm	REV.: A/0	OBJECT: MY	PART NO.: BS-16-A4AK006
					DRAW NO.:MY-CP-0223