



REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

a.HOUSING:PA66

b.CONTACT:BRASS

(SURFACE PLATING: Sn 100u"-120u")

SEE ORDERING INFORMATION

2.ELECTRIC:

a.CONTACT RESISTANCE: 50 MILLIOHMS MAX

b.INSULATION RESISTANCE: 100 MEGA OHMS MIN

c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL

d.OPERATING TEMPERATURE: -40°C~ +105°C

ORDERING INFORMATION

BS-05-A***017

电池座系列

BS-05系列

DIP 90° TYPE






PLATING:
A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

工程部

2019-01-07

LQ. HUANG

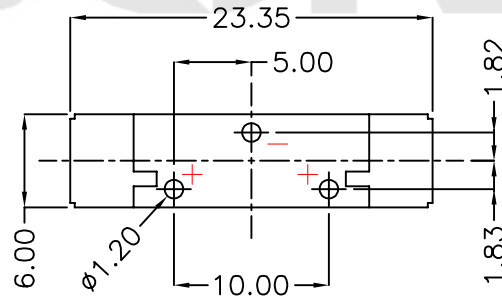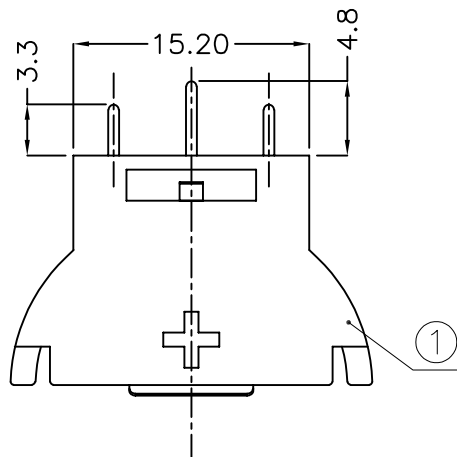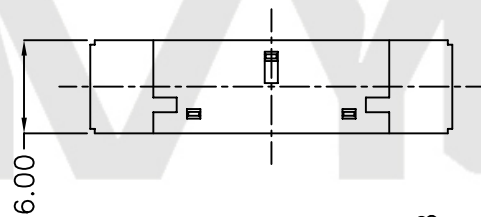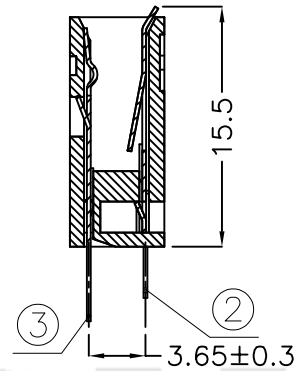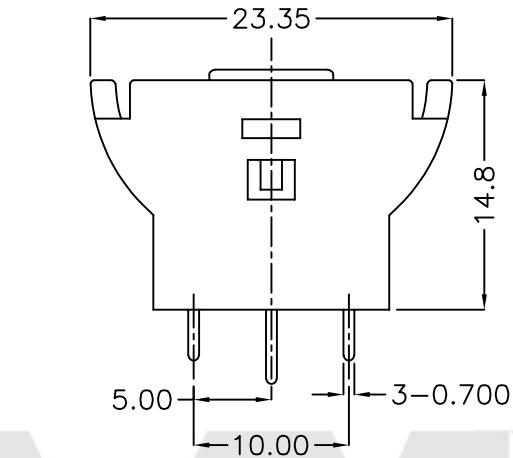

PCB Layout Diagram
Top View

3	TERMINAL(-)	1	BRASS, T=0.25mm	Sn-Plating
2	TERMINAL(+)	1	BRASS, T=0.25mm	Sn-Plating
1	HOUSING	1	PA66	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美阳 www.meiyangdz.com						
DECIMALS: X :±0.30 X.X :±0.25 X.XX :±0.20 X.XXX :±0.10		ANGLES: X :±1° X.X :±0.5°		DSND	YangFeng	DATE	2019-01-07	TITLE: BS-2032-5 Sn 平脚
WEIGHT: 1.75g		SHEET 1 OF 1		CHKD	ZhouRuicia	DATE	2019-01-07	
				APVD	XueShunYong	DATE	2019-01-07	PART NO.: BS-05-A1BK017
UNIT: mm		REV.: A/1		SCALE: 2:1		SIZE: A4		VIEW: 
				OBJECT: MY		DRAW NO.:MY-CP-0179		